


## ZICK ZACK Standard M

1253 × 65 × 44 mm

ZICK ZACK Standard is our ready to use package with everything you need to get started right away. ZICK ZACK Standard comes in 3 different sizes: S (651mm), M (1253mm) and L (1554mm). All sizes are available with a spectacular flock-finish in various colours on the inside: ZICK ZACK Flock. For projects, we can customise the luminaire in many ways: ZICK ZACK Custom.

Lamp Type	Ledvance LED Tube T8 Smart+ WiFi 24W 827 - 865 tunable white 1200 mm
Light Emission	2300 lm
Light Colour	2700-6500 K
Length × Height × Width	1253 × 65 × 44 mm
Weight	856 g
Dimming	Dimmable and tunable with the LEDVANCE SMART+ WiFi App
Colour Rendering Index	80-89
LED Lifetime	50.000 h (L70)
UGR	≤ 19
System Power	24 W
Power Supply	220-240 V
Protection Class	SK I
Water and Dust Resistance	IP 20
External Casing	Aluminium, silver anodised, polished
Suspension	0.6 mm steel wires, variable leveling up to 1.5 m suspension length
Shipping	Installation manual, luminaire with socket plug
Manufacturer	Lambert S.r.l Italy

### Dimensions

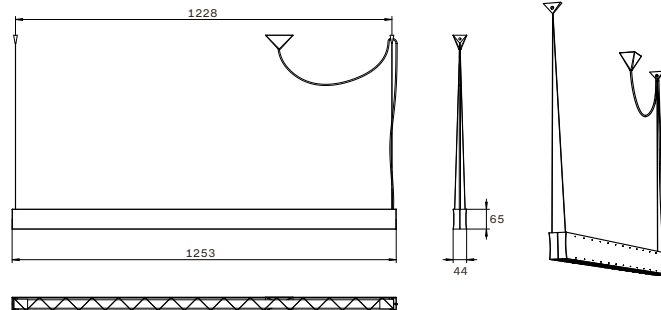


### Office Lighting Standard

ZICK ZACK Standard L fulfills office lighting requirements according to EN 12464 on a task area of 1000 × 600 mm, which is suitable for most applications. Glare protection is fully given. The recommended hanging height is 1700 mm above ground.

### Light Distribution

Direct 69%, indirect 31%



### Installation

Delivered with a plug to fit a nearby socket, it is independent from ceiling outlets. Alternatively, an electrician can quickly mount the luminaire in a ceiling outlet.



reddot winner 2020  
lighting design